



Receiver Unit

Features

- ▶ Indoor & Outdoor receiver unit
- ▶ To control Pan / Tilt / Auto-pan / Lens
- ▶ RS-485 communication (Surge protection circuit built-in)
- ▶ Power source 110VAC / 220VAC




HRX-2000

Technical Information

MECHANICAL		
Pan/Tilt	Output	4 (Pan Left / Right, Tilt Up / Down)
	Relay	250V AC, 5A
Lens Output	Output	4 (Zoom In / Out, Focus Near / Far)
	Relay	12V DC, 1A
Autopan (Using AUX)	Output	1
	Relay	250V AC, 1A
Camera Power		12V DC
Communications	Communication	RS-485, 9600bps
	Max, Distance	1,2km
ELECTRICAL		
Power Source		110 / 220V AC, 50/60Hz
ENVIRONMENTAL		
Operating Temperature		-18℃ ~ 50℃
Operating Humidity		10 ~ 80% RH
PHYSICAL		
Case Material		ABS, Aluminum die-casting
Weight		4Kg
Dimensions (WxHxD)		380 x 280 x 130 mm

Dimensions & Connections

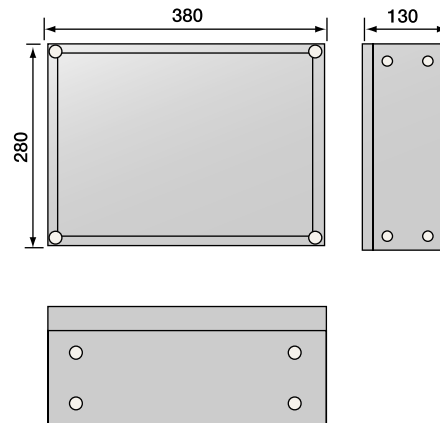

(Unit : mm)